

Zip Chill Fountain[®]

Wall mounted chillers

Filtered drinking water



Features

The perfect solution for providing chilled filtered water in public areas

Bump action electronic controls and lockable front panels

Heavy duty, easy-to-clean stainless steel bowls and stainless steel case

Can be configured for adults, child or wheelchair usage or any combination of these

WRAS approved and CE endorsed

Zip Chill Fountain wall-mounted chiller

Filtered drinking water

Product Selection Chart

	Product code	Dimensions (mm) H x W x D	Initial draw off (glasses*)	Recovery (glasses per hour)	Compressor (hp)
Zip Chill Fountain® Single bubbler (adult)	CH105	1140 x 500 x 410	8	140	1/4
Zip Chill Fountain® Single bubbler (child)	CH145	1140 x 500 x 410	8	140	1/4
Zip Chill Fountain® Single bubbler (wheelchair)	CH115	1140 x 500 x 410	8	140	1/4
Zip Chill Fountain® Double bubbler (adult/adult)	CH155	1140 x 1005 x 410	8	140	1/4
Zip Chill Fountain® Double bubbler (child/child)	CH165	1140 x 1005 x 490	8	140	1/4
Zip Chill Fountain® Double bubbler (wheelchair/wheelchair)	CH135	1140 x 1005 x 490	8	140	1/4
Zip Chill Fountain® Double bubbler (adult/child)	CH125	1140 x 1005 x 490	8	140	1/4
Zip Chill Fountain® Double bubbler (adult/wheelchair)	CH175	1140 x 1005 x 490	8	140	1/4
Zip Chill Fountain® Double bubbler (child/wheelchair)	CH185	1140 x 1005 x 490	8	140	1/4

Description

- Wall mounted public access chiller with bump action electronic controls and bubbler
- Delivers 140 glasses per hour of chilled filtered water within the operating range of 5°C to 10°C
- Option of single or dual water bowls
- Bump action electronic controls for ease of use
- Configurable for adults, children, wheelchair access or any combination of these
- Compressor rated at 1/4 hp
- Equipped with sub-micron filters
- Stainless steel water bowl and outer case
- 15 mm BSP water connections

Storage capacity

Nominal 1.8 litres.

Output capacity

Rated at 140 glasses per hour at <10°C.

Rating

0.3 kW.

Refrigerant type

Non-toxic R134A.

Chiller type

Fan cooled condensor with a compressor rated at 1/4 hp.

Configuration

Can be configured for adult, child or wheelchair use or any combination of these.

Outer case

Brushed finish stainless steel case with lockable front access panel.

Filtration type

Submicron fully encapsulated double action carbon filter.

Approvals

WRAS approved and CE endorsed.

Warranty

One-year on site parts and labour. For full details of the Zip Warranty Scheme visit: www.zipheaters.co.uk/warranty.

Installation

Location

The chiller should be wall mounted where it is easy for users to access.

Water, drainage and power should all be available nearby.


Plumbing

Water connections 15mm BSP.

Electrical

To be wired to a double pole fused spur, minimum break rating of 13 amps. Installation must comply with current IEE regulations. amps. Installation must comply with current IEE regulations.

Dimensions

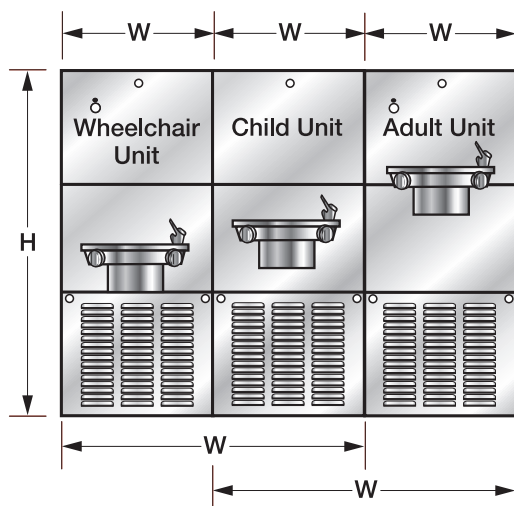

Typical installation

