

Zip HydroTap[®] G4

Boiling | Filtered | Instantly

Residential model DOMHB4

With new Zip G4 power-saving technology and Zip 0.2 micron filtration.



Can be installed away from any sink with the optional ZT008 'font' kit accessory.



Simple to install on any kitchen sink.



Boiling filtered water instantly. Simple way to have boiling filtered water on tap at home.

1. Saving energy

- Superior Zip G4 thermal insulation now significantly reduces standby energy consumption.
- Power-Pulse™ technology maintains boiling water to within 0.2°C of set temperature.
- Boiling temperature can be pre-set: from 100°C down to 68°C.
- Sleeps or "powers-off" after two hours of non-use, to minimise daily power consumption.
- Automatically sleeps when the kitchen goes dark, for added power savings overnight.
- Integral 24/7 automatic timer turns power on and off over weekends or weekday periods.

2. User safety

- Choice of fingertip control for fast cup filling (lever down) or hands-free pot filling (lever up).
- Can be set to require finger-thumb safety button operation for access to instant boiling water.
- Can also be set to boiling water "isolation mode" for total safety when kitchen is unattended.

3. Healthier drinking

- Inbuilt Zip 0.2 micron NSF-certified filter puts crystal-clear better-tasting water on tap, filtering out chlorine taste and odour and impurities as tiny as one five-thousandth of a millimetre, including protozoan cysts such as Cryptosporidium, but does not remove beneficial fluoride.

New under-sink Zip G4 Command-Centre™ leads the world in energy-saving technology, has a pin-code protected touch-screen to simplify adjustments and automatically monitors performance to give an operating history if ever required.

Warranty

24 months, plus additional 36 months boiling tank warranty.



Typical specification

Under-sink boiling filtered water appliance equipped with two way lever action electronic tap head, integral 5 bar pressure limiting and Dual Check valve, NSF certified 0.2 micron filter. Full colour interactive touch screen display with pin code protection, 2 boiling water safety modes, 3 energy saving modes including a sensor activated "sleep when its dark" feature. Upgradable boiling water capacity with additional "Booster" module and the ability to adapt to provide approx. 55°C hot water for sanitary use to a secondary outlet with additional "Vented Mixer" kit.





Instant Boiling Water

Zip HydroTap® G4

Boiling | Filtered | Instantly

Zip Model	Rating (kW) @ 230 V	Cabinet Dimensions W x D x H (mm)
DOMHB4	1.43	280 x 313 x 335

Order code shown here is for boiling water tap installed on a sink. To install boiling water tap on a 'font' also specify a font kit: order code ZT008.

Boiling System

Open outlet, vented system, factory set to operate at 98°C.
Flow rate 4.0 l/min.

Location

Tap should be positioned so it drains into a suitable sink. Alternatively tap can be installed away from any sink on its own 'font'. Tap should be situated as closely as possible to directly above the under-sink Command Centre. Maximum distance from the base of the tap to the Command Centre is one metre. Command Centre must have clearances as shown on the drawings.

Plumbing

Must be installed in accordance with UK Water Supply Regulations.
Designed for direct connection to a potable (drinkable) cold water supply with a minimum pressure of 0.7 bar (1.7 bar if fitted with booster unit or scale filtration and 2.0 bar with 'Vented Mixer' kit). A 5 bar pressure limiting valve is fitted internally.
An isolating valve should be installed between the water supply and the Command Centre.

Electrical

Installation must comply with current IEE regulations.
To be wired to a double pole 13 amp fused spur.
ZT011 Booster requires a separate fused spur.

Caution

In hard water areas where mineral scale accumulation may be an issue, consideration should be given to the maintenance required.
We recommend use of the Zip Professional high performance limescale filtration system.

Accessories

- SP91546 Classic Vented Mixer.
- SP91547 Tall Vented Mixer.
- SP91548 Square Vented Mixer.
- ZT011 – Booster system.
- ZT008 – Zip G4 font installation kit.
- ZT402 – Zip 0.2 micron replacement filter.
- Scale filters**
- FL1100G4 KIT – Residential use.



To order any model to be supplied with extension levers and Braille pads, add D to the end of the Order Code.

Approvals

CE endorsed

Technical Support


Contact Zip on:
Tel: 0845 6 005 005 / 0345 6 005 005
email: service@zipheaters.co.uk

Five Year Warranty



Appliance warranty
24 months, plus additional
36 months boiling tank warranty.
See website for details.



Sink Detail

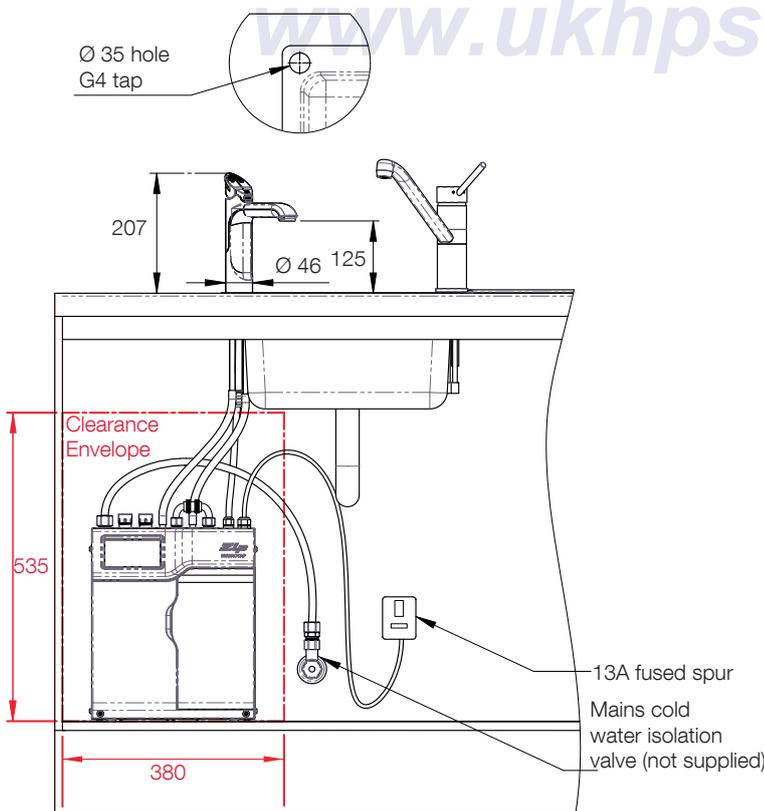

Font Detail

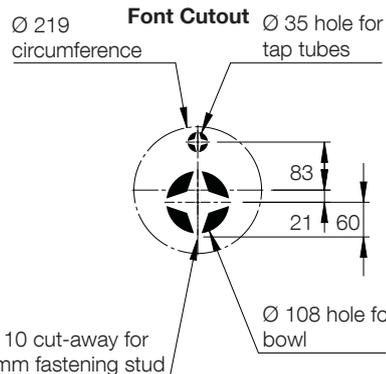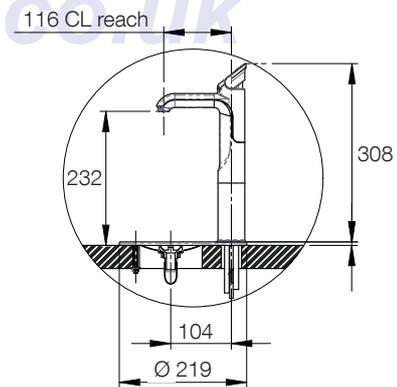

Dimensions in mm

As Zip policy is one of continuous product improvement changes to specifications may be made without prior notice. The terms 'Zip', 'Power-Pulse', 'HydroTap' and 'Command Centre' are trade marks.